


# MEDIATRACK

USB MIXER / INTERFACE WITH BLUETOOTH

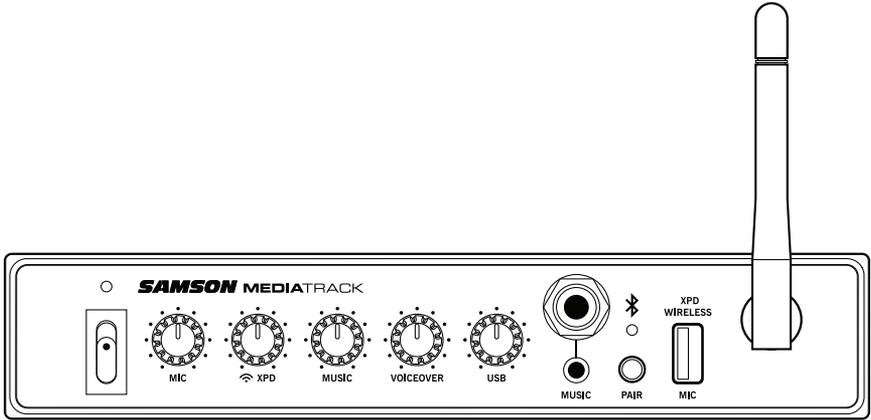

OWNER'S MANUAL

**SAMSON**<sup>®</sup>

MEDIATRACK MIXER

---

Copyright 2022  
v1.3  
Samson Technologies Corp.  
278-B Duffy Ave  
Hicksville, New York 11801  
[www.samsontech.com](http://www.samsontech.com)

**SAMSON**

# Important Safety Information



ATTENTION  
RISQUE DE CHOC ÉLECTRONIQUE -  
NE PAS OUVRIR



This lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of non-insulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute a risk of electric shock.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance instructions in the literature accompanying the appliance.

**WARNING: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK) AS THERE ARE NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.**

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Samson Technologies is under license. Other trademarks and trade names are those of their respective owners.”



If you want to dispose this product, do not mix it with general household waste.

There is a separate collection system for used electronic products in accordance with legislation that requires proper treatment, recovery and recycling.

Private household in the 27 member states of the EU, in Switzerland and Norway may return their used electronic products free of charge to designated collection facilities or to a retailer (if you purchase a similar new one).  
For Countries not mentioned above, please contact your local authorities for a correct method of disposal.

By doing so you will ensure that your disposed product undergoes the necessary treatment, recovery and recycling and thus prevent potential negative effects on the environment and human health.

**MEDIATRACK MIXER**

# Important Safety Information

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at the plugs, convenience receptacles, and at the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug the apparatus during lightning, short circuit or when unused for long periods of time.
14. Refer all servicing to qualified personnel. Service is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. This appliance shall not be exposed to dripping or splashing water and that no object filled with liquid such as vases shall be placed on the apparatus.
16. Caution - to prevent electrical shock, match wide blade plug to wide outlet slot fully insert the plug into the outlet.
17. Please keep a good ventilation environment around the entire unit.
18. **WARNING:** The direct plug-in adapter or AC/DC adapter is used as disconnect device, the disconnect device shall remain readily operable.
19. No naked flame sources, such as lighted candles, should be placed on the apparatus.
20. This apparatus is intended to be used in moderate and/or tropical climates.



# Important Safety Information

## FCC Notice

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
  - (1) This device may not cause harmful interference.
  - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## FCC Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

## RF Warning Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

This device complies with RSS-310 of Industry Canada. Operation is subject to the condition that this device does not cause harmful interference.

Hereby, Samson Technologies Corp, declares that this MEDIATRACK is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. The declaration of conformity may be consulted at:

[http://www.samsontech.com/site\\_media/support/manuals/MEDIATRACK\\_DOC.pdf](http://www.samsontech.com/site_media/support/manuals/MEDIATRACK_DOC.pdf)

# Introduction

Thank you for purchasing the Samson MediaTrack USB Mixer/Interface. The MediaTrack rack mount USB mixer is a versatile tool for many sound and recording applications. It features microphone and music inputs, Bluetooth® connectivity for streaming audio, and a USB jack for connecting an optional Samson XPD USB Digital Wireless System.

In the box, you'll find a registration card enclosed—please don't forget to follow the instructions so that you can receive online technical support and so we can send you updated information about this and other Samson products in the future. Also, be sure to check out our website ([www.samsontech.com](http://www.samsontech.com)) for information about our full product line. We recommend you keep the following records for reference, as well as a copy of your sales receipt.

Serial number: \_\_\_\_\_

Date of purchase: \_\_\_\_\_


If you have any questions or comments regarding the MediaTrack or any other products from Samson, do not hesitate to contact us at [support@samsontech.com](mailto:support@samsontech.com).

With proper care and maintenance, your MediaTrack will operate trouble-free for many years. Should your MediaTrack ever require servicing, a Return Authorization (RA) number must be obtained before shipping your unit to Samson. Without this number, the unit will not be accepted. Please visit [www.samsontech.com/ra](http://www.samsontech.com/ra) for an RA number prior to shipping your unit. Please retain the original packing materials and, if possible, return the unit in its original carton. If your MediaTrack was purchased outside of the United States, contact your local distributor for warranty details and service information.

## Features


- 4-channel stereo line mixer
- USB Interface for connecting with computers or tablets
- XLR-1/4" balanced microphone input
- Stereo line channel with RCA, 1/4", and 1/8" (3.5mm) inputs
- Bluetooth® connectivity to wirelessly stream from a mobile device
- Samson XPD Wireless USB Port (system sold separately)
- Voiceover priority ducking with variable hold time
- 15V phantom power
- Rackmount kit and power adapter included

# Front Panel Callouts

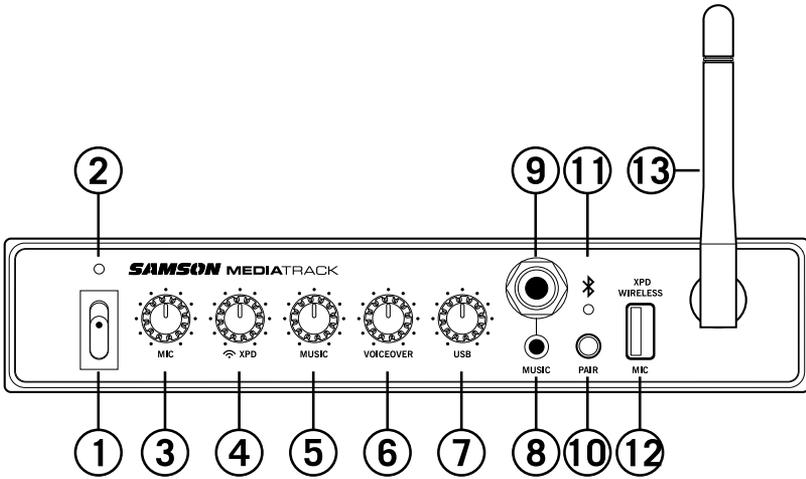

- 1. Power Switch** - Use this switch to turn the MediaTrack on and off. To avoid potential damage to your speakers, turn the MediaTrack on before you turn on any connected power amps, and turn it off after the power amps are turned off.
- 2. Power Indicator** - LED lights green indicating the unit is powered on.
- 3. MIC Volume** - This knob controls the level of the MIC input.
- 4. XPD Level** - This knob controls XPD Wireless volume level.
- 5. MUSIC Volume** - This knob controls the level of the Music inputs (rear panel RCA, front panel 1/4" and 1/8") and the *Bluetooth* audio.
- 6. VOICEOVER** - Controls the amount the Music and *Bluetooth* audio will be lowered (ducking) when there is signal present at the Mic channel.
- 7. USB Level** - Controls volume of USB computer audio stream to the MediaTrack audio outputs.
- 8. 1/8" (3.5mm) Music Input** - Stereo 1/8" (3.5mm) jack to connect line level sources. Level of this input is controlled by the MUSIC Volume knob.
- 9. 1/4" Music Input** - Stereo 1/4" jack to connect line level sources. Level of this input is controlled by the MUSIC Volume knob.
- 10. Pairing Indicator** - Displays the *Bluetooth* status of the MediaTrack.
- 11. Pairing Button** - Press and hold this button to enable discoverable mode in order to pair with a *Bluetooth* audio device. The LED will blink quickly when discoverable mode is enabled.
- 12. Samson XPD WIRELESS USB Input** - Connect an optional Samson XPD USB Digital Wireless receiver to this input. The wireless level is controlled by the XPD Volume control.
- 13. Bluetooth Antenna** - This antenna receives signal from a paired device and should be placed in a vertical position when using *Bluetooth*. The *Bluetooth* receiver has a range of approximately 100' (30m).

## Rear Panel Callouts

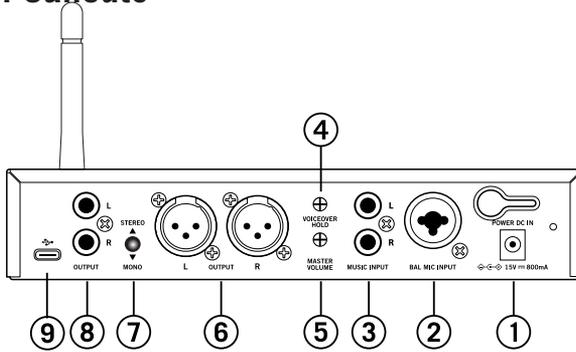

1. **DC Input** - Connect the supplied power adapter here, using the strain relief\* as shown in the illustration below. **WARNING:** Do not substitute any other kind of power adapter. Doing so can cause severe damage to the MediaTrack and will void your warranty.
2. **BAL MIC INPUT** - Use this Combo XLR plus 1/4" jacks to connect a microphone or wireless microphone receiver. The XLR input provides 15-volt phantom power for use with condenser microphones.
3. **Stereo RCA MUSIC INPUT** - Stereo line level input for connecting the output of devices such as MP3, CD, or any line level audio device using standard RCA cables.
4. **VOICEOVER HOLD** - This knob controls the hold time of the VOICEOVER priority ducking from 0.5s–3s.
5. **MASTER VOLUME** - The MASTER VOLUME knob controls the overall output level. This knob determines the final output signal level. Signals from all channels are routed here just before being routed to the OUTPUT jacks.
6. **Balanced XLR OUTPUT** - Balanced XLR outputs to connect the MediaTrack to a power amplifier or speakers. In recording applications, these outputs can be used to connect to a stereo device such as computer sound card, MP3, or hard disk recorder. The signal at the OUTPUT jacks follow the MASTER VOLUME control.
7. **STEREO / MONO Switch** - When the switch is in the out, STEREO position, the left and right signals are routed to the corresponding outputs. In the in, MONO, position, the left and right input signals are summed together and fed to both Left and Right OUTPUT jacks.
8. **Unbalanced RCA OUTPUT** - Unbalanced RCA outputs to connect the MediaTrack to a power amplifier or speakers. In recording applications, these outputs can be used to connect to a stereo device such as computer sound card, MP3, or hard disk recorder. The signal at the OUTPUT jacks follow the MASTER VOLUME control.
9. **USB C OUTPUT** - Using the supplied USB C cable connect your laptop or tablet to record your performance. Adjust input level with USB control knob on front panel.



*\*Using the strain relief: Gather up a loop of wire and pass it through the strain relief, then pass the adapter plug through the loop in order to create a knot.*

## Quick Start

1. Remove all packing materials and decide where the unit is to be physically placed. The MediaTrack can be mounted in any standard 19" rack (requiring one rack space), or used on a tabletop.
2. Before connecting a microphone or line level audio device, make sure that the power to all your systems components, including the MediaTrack, is turned off.
3. Using an XLR or 1/4" cable, connect a wired microphone or the output of a wireless microphone receiver to the Mic input jack on the rear of the MediaTrack.
4. Connect a music source, like a CD player, to the RCA jacks on the rear panel of the MediaTrack. The red connector is the right input and the white connector is the left input. Portable audio devices, like an MP3 player, can be connected to the 1/4" or 1/8" stereo inputs on the front of the MediaTrack.
5. Connect the outputs of the MediaTrack to the inputs of a power amplifier or speaker system using XLR or RCA cables.
6. Turn the MediaTrack Master Volume control all the way down and turn the MediaTrack power on.  
NOTE: It is important to remember the Golden Rule of audio ... "LAST ON, FIRST OFF". Translated, this means that when turning on your system, you should always turn your power amplifiers or powered monitors on LAST, and when turning your system off, turn your power amps off FIRST. This helps avoid any loud pops caused by inrush current at power up, which can sometimes damage loudspeakers.
7. Turn the power amplifier or speaker system on and turn the volume up.
8. Set the MIC volume control of the MediaTrack to the 12 o'clock position.
9. While talking into the microphone, raise the MASTER VOLUME control until you have reached the desired level.
10. Play music from the connected music source and raise the MUSIC volume control. Adjust the MIC and MUSIC volume until the microphone signal is able to be heard above the music.

## Avoiding Feedback


Feedback is the annoying howling and squealing that can heard when the microphone picks up sound from the speaker. The sound is then re-amplified back through the speaker again, creating a feedback loop. Follow these steps to minimize the likelihood of feedback:

- Avoid pointing the microphone directly at the speakers. In general it is recommended that the microphone be positioned behind the speaker enclosure. This uses the directional characteristics of the speaker and microphone to your advantage.
- Keep the microphone as far from the speakers as possible. This will help achieve isolation between the speaker and the microphone.
- Position the microphone as close to the sound source as possible. This will enable the microphone to pick up more direct sound, and allow you to reduce the microphone input gain control.

## Pairing with a Bluetooth® device

*Bluetooth* is a wireless communication technology that allows for connectivity between a wide range of devices. The MediaTrack uses Bluetooth to stream high quality audio from your Bluetooth-enabled device without the need for connecting any cables. In order for your device to work with the MediaTrack, it must first be paired.

1. With the MediaTrack and your *Bluetooth* device powered on, press and hold the PAIR button on the front panel of the MediaTrack mixer to make the mixer discoverable. The white *Bluetooth* indicator will flash slowly.
2. In the settings of your *Bluetooth* device, set it to "discover" available devices.
3. From the *Bluetooth* device list, select the "SAMSON BLUETOOTH" device.
4. If your device asks for a passkey, enter digits 0000 (four zeros) and press OK. Some devices may also ask you to accept the connection.
5. As the MediaTrack is connecting to your device, the *Bluetooth* indicator will quickly flash white.
6. The MediaTrack indicates that pairing is complete when the indicator turns steady white. You can now stream audio from your device to the MediaTrack.
7. On your *Bluetooth* device, set the volume to the maximum setting and start playing music.
8. Use the MUSIC volume knob on the front panel of the MediaTrack to set the desired level of the *Bluetooth* audio.

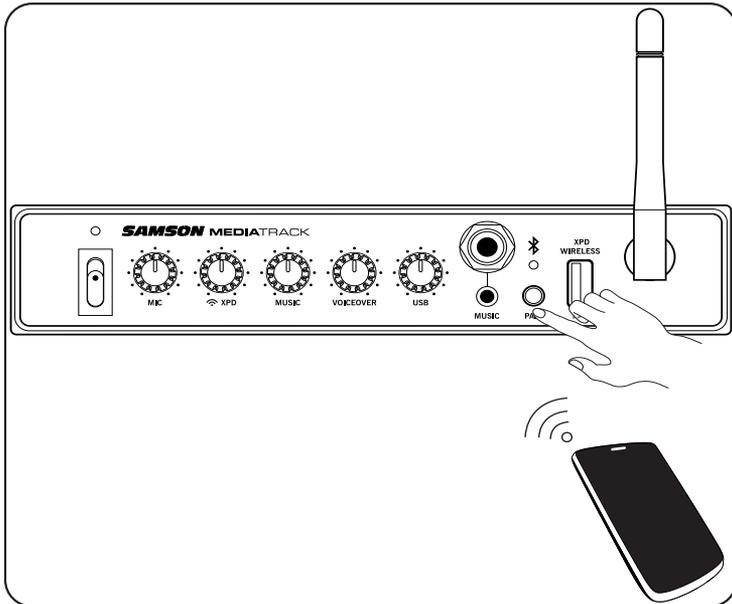

# Specifications

## Frequency Response (to XLR balanced output, re +4 dBu output)

Music Inputs (1/4", 1/8", RCA)	20Hz-20kHz, +0/-0.5dB, 20Ω source
XLR Mic Input	73.5Hz-20kHz, +0/-3dB, 150Ω source
Bluetooth	20Hz-20kHz, +0/-3dB
USB Playback	12.4Hz-18.2kHz, +0/-1dB

## THD+N (to XLR balanced output, re +4 dBu output)

Music Inputs (1/4", 1/8", RCA)	<0.004%, 25Hz-17kHz, 20Ω source
XLR Mic Input	<0.006%, 75.5Hz-20kHz, 150Ω source
Bluetooth	<0.01%, 20Hz-20kHz
USB Playback	<0.005%, 20Hz-20kHz

## Equivalent Input Noise

XLR Mic Input	-108dBu, A-weighted, max gain (1%THD+N output),150Ω source
---------------	--

## Maximum Gains (to XLR balanced output, master volume maximum, 1kHz test tone)

Music inputs (1/4", 1/8", RCA)	20.5dB, 20Ω source
XLR mic input	51.6dB, 150Ω source
Samson XPD System	43.1dB, 20Ω source
Bluetooth	20.3dB
USB playback	11.9dB

## Residual Noise (A-weighted, all controls minimum)

XLR Out	-113.8dBu
RCA Out	-113.8dBu
USB recording	-96dBFS

## Maximum Input Level (1% THD+N)

Music inputs (1/4", 1/8", RCA)	+5.46dBu, 9Hz-7kHz, +0/-0.1% THD+N, 20Ω source
XLR mic input	-6.58dBu, 80Hz-4.5kHz, +0/-0.1% THD+N, 150Ω source

## Maximum Output Level (1% THD+N)

Mic Output	+14.7 dBu (1% THD+N)
------------	----------------------

## Dynamic Range

XLR Out	95dB, re +15dBu output, 22kHz BW
RCA Out	100dB, re +15dBu output, 22kHz BW

## Input Impedance (1kHz test tone)

Music Inputs (1/5", 1/8", RCA)	10kΩ
XLR Mic Input	1.6kΩ

## Output Impedance (1kHz test tone)

XLR Out	400Ω
RCA Out	200Ω

## Voiceover

Attack Time	8ms
Hold Time	250ms (shortest setting), 2s (longest setting)
Release Time	485ms
Maximum gain reduction	28.6dB

## USB C I/O

Number of input channels	2
Number of output channels	2
Maximum sample rate	48 kHz
Bit depth	16 bits
USB Playback to XLR Output gain	0dBFS = +12dBu at XLR output
USB Output Power	USB3.0 5VDC 200mA
Phantom Power	15VDC
Power Adapter	15VDC 800mA (center positive/sleeve negative)
Bluetooth	V4.0, A2DP
Working Frequency	2.402GHz - 2.480GHz
RF Power	<10mW EIRP
Transmission Range	>10m (>32')

## Dimensions and Weight

Dimensions	8.78" x 5.43" x 1.69" 223mm x 138mm x 43mm
Weight	1.88 lbs / 0.852 kg

Samson Technologies Corp.  
278-B Duffy Ave  
Hicksville, New York 11801  
[www.samsontech.com](http://www.samsontech.com)

**SAMSON**